



**technische import**

**SUCO Productinformatie**

**0240**




SUCO Robert Scheuffele GmbH & Co. KG

**[www.bafa.nl](http://www.bafa.nl)**

# 0240 / 0241

## Diaphragm / piston pressure switches, hex 27

- Zinc-plated steel (CrVI-free)
- Overpressure safety up to 300 / 600 bar <sup>1)</sup>
- Switching point can also be adjusted during use
- Protection class 2, protective insulation 

p <sub>max.</sub> in bar	Adjustment range in bar	Tolerance in bar at room temperature	Male thread	Order number
-----------------------------	----------------------------	---	-------------	--------------

### 0240 Diaphragm pressure switches

300 <sup>1)</sup>	0.3 – 1.5	± 0.2	G 1/4	0240 – 457 03 – X – 003
			NPT 1/8	0240 – 457 04 – X – 300
			NPT 1/4	0240 – 457 09 – X – 305
			7/16-20 UNF	0240 – 457 20 – X – 310
			9/16-18 UNF	0240 – 457 21 – X – 315
	1 – 10	± 0.5	G 1/4	0240 – 458 03 – X – 006
			NPT 1/8	0240 – 458 04 – X – 301
			NPT 1/4	0240 – 458 09 – X – 306
			7/16-20 UNF	0240 – 458 20 – X – 311
			9/16-18 UNF	0240 – 458 21 – X – 316
	10 – 20	± 1.0	G 1/4	0240 – 459 03 – X – 009
			NPT 1/8	0240 – 459 04 – X – 302
			NPT 1/4	0240 – 459 09 – X – 307
			7/16-20 UNF	0240 – 459 20 – X – 312
			9/16-18 UNF	0240 – 459 21 – X – 317
	20 – 50	± 2.0	G 1/4	0240 – 461 03 – X – 012
			NPT 1/8	0240 – 461 04 – X – 303
			NPT 1/4	0240 – 461 09 – X – 308
			7/16-20 UNF	0240 – 461 20 – X – 313
			9/16-18 UNF	0240 – 461 21 – X – 318

### 0241 Piston pressure switches

600 <sup>1)</sup>	50 – 150	± 5.0	G 1/4	0241 – 460 03 – X – 003
			NPT 1/8	0241 – 460 04 – X – 304
			NPT 1/4	0241 – 460 09 – X – 309
			7/16-20 UNF	0241 – 460 20 – X – 314
			9/16-18 UNF	0241 – 460 21 – X – 319

### Seal material – Application areas



NBR	Hydraulic/machine oil, heating oil, air, nitrogen, etc.	1
EPDM	Brake fluid, hydrogen, oxygen, acetylene, etc.	2
FKM	Hydraulic fluids (HFA, HFB, HFD), petrol/gasoline, etc.	3
HNBR	Hydraulic/machine oil, ester-based bio-oils	9

Refer to page 64 for the temperature range and application thresholds of sealing materials.

Your order number: **024X – XXX XX – X – XXX**

# M.5

hex 24 / 27  
Ready-wired

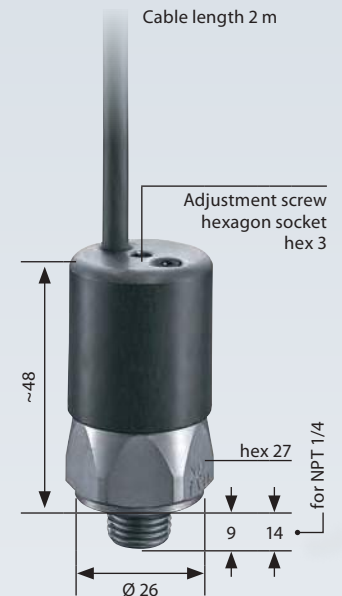

#### Contact assignment:

- 1 = Black
- 2 = Red
- 4 = White



<sup>1)</sup> Static value. Dynamic value is 30-50 % lower. Values pertain to the hydraulic/pneumatic part of the pressure switch.



**technische import**

[www.bafa.nl](http://www.bafa.nl)