



**technische import**

# Productinformatie



**A.U.K. MÜLLER GMBH & CO. KG**

**BAFA.NL**

# Product Information

3/2-way drain valve, DN 40, vacuum controlled



**A.u.K. Müller**

Solenoid valves  
Control valves  
Special valves and systems

A. u. K. Müller GmbH & Co. KG  
Dresdener Str. 162  
D-40595 Düsseldorf/Germany

Tel.: +49(0)211-7391-0  
Fax: +49(0)211-7391-281

e-mail: [info@akmueller.de](mailto:info@akmueller.de)  
Internet: [www.akmueller.de](http://www.akmueller.de)

Series 04.040.114



## Characteristics

- direct acting
- vacuum controlled
- Optional PVDF valve body
- long term performance capability
- max. medium temperature 90°C
- no minimum pressure required
- suitable for spray- and jet water
- high operating safety through the use of high quality materials and 100% final testing of the products

## Applications

- industrial washing machines and dishwashers
- cleaning devices for medical equipment
- cleaning and disinfection systems in the dairy industry and process engineering

## Description


3/2-way direct acting dump valve of nominal diameter DN 40 for controlling low aggressive media, such as cleaning or disinfection agents.

Valves of this type have a medium separated control pressure chamber and can be manufactured in various materials equipped with threaded or hose connections.

The valve with valve body made of PPE, is suitable for water of higher temperature and chemically resistant.

By using high quality insulation materials, continuous duty at higher medium temperatures is possible.


typical performance curve

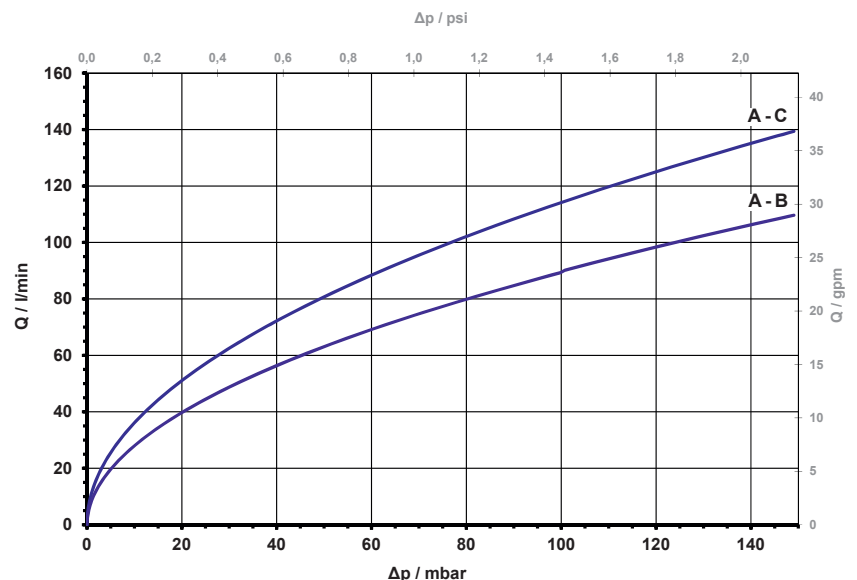



#### Series 04.040.114


#### Technical Data

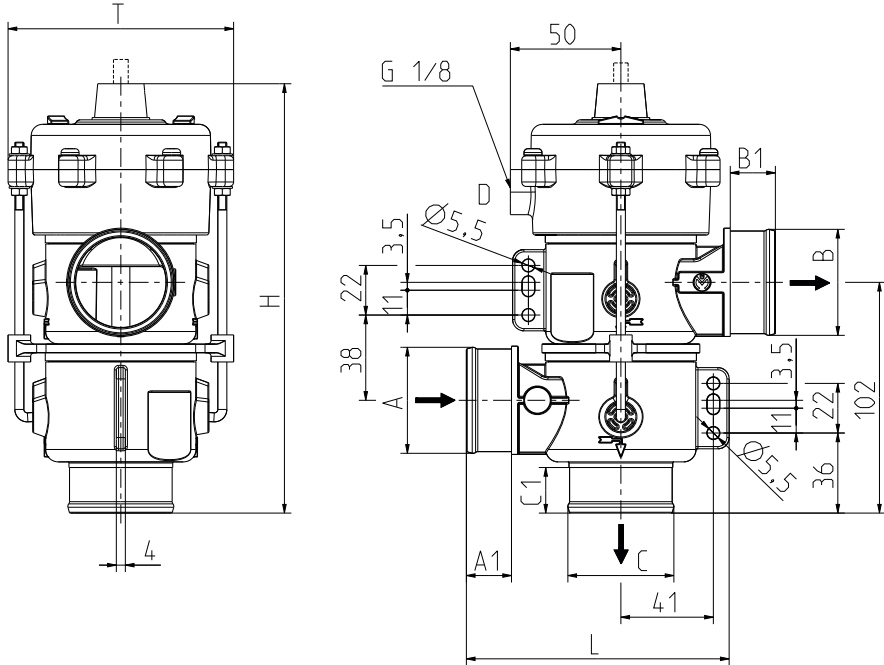

<b>Type</b>	drain valve, vacuum controlled	
<b>Construction</b>	2-chamber valve, direct acting, 3/2-way	
<b>Fitting position</b>	any, preferably upwardly	
<b>Media</b>	low aggressive media, such as cleaning or disinfection agents in water	
<b>T-Medium</b>	90	°C max.
<b>T-Ambient</b>	50	°C max.
<b>DN</b>	40	mm
<b>p-Operating</b>	0 - 150	mbar max.
<b>Control vacuum (D)</b>	40 - 80 -0,2 -- -0,6	kPa abs bar rel.

#### Materials

<b>Valve body</b>	PPE, PVDF, stainless steel on request
<b>Control chamber</b>	PPE
<b>Plunger guide</b>	stainless steel
<b>Plunger</b>	stainless steel
<b>Sealings</b>	EPDM FKM, NBR on request

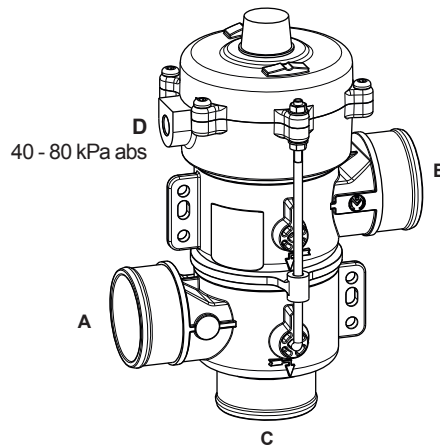

<b>D - inactive</b>	A - C	open
	A - B	closed
<b>D - active</b>	A - C	closed
	A - B	open

Control port **D** can be rotated by 180° to direction **B** on request.

To prevent moisture entries in the vacuum chamber, appropriate measures should be provided.

#### Options

ID	Material	Ø A		Ø B		C		Length L	Height H	Depth T
		Ø A	A1	Ø B	B1	C	C1			
51464	PPE	G 1 1/2	21	G 1 1/2	21	G 1 1/2	21	117	190	100
51572		nozzle 1 1/2"		nozzle 1 1/2"	G 1 1/2					
auf Anfrage		G 1 1/2		G 1 1/2	nozzle1 1/2"					
51465		nozzle 1 1/2"		nozzle1 1/2"	nozzle1 1/2"					

Emergency manual override on request.



**Series 04.040.114**

**International vacuum/pressure conversion table**

Unit	bar	N/cm <sup>2</sup>	kPa	atm., kp/cm <sup>2</sup> , m H <sub>2</sub> O	Torr, mm Hg	psi
bar	1	10	100	1,0197	750,06	14,5
N/cm <sup>2</sup>	0,1	1	10	0,1019	75,006	1,45
kPa	0,01	0,1	1	0,0102	7,5006	0,145
atm., kp/cm <sup>2</sup> ; m H <sub>2</sub> O	0,9807	9,807	98,07	1	735,56	14,22
Torr, mm Hg	0,00133	0,0133	0,1333	0,00136	1	0,0193
psi(a)	0,0689	0,6896	6,896	0,0703	51,68	1

**International vacuum/ pressure conversion table  
comparing absolute and relative values**

Relative vacuum	Residual pressure absolute		Relative pressure					
	kPa	bar	bar	N/cm <sup>2</sup>	kPa	atm., kp/ cm <sup>2</sup> , m H <sub>2</sub> O	Torr, mm Hg	psi
10	90	0,9	-0,101	-1,01	-10,1	-0,1	-76	-1,47
20	80	0,8	-0,203	-2,03	-20,3	-0,2	-152	-2,94
30	70	0,7	-0,304	-3,04	-30,4	-0,3	-228	-4,41
40	60	0,6	-0,405	-4,05	-40,5	-0,4	-304	-5,88
50	50	0,5	-0,507	-5,07	-50,7	-0,5	-380	-7,35
60	40	0,4	-0,608	-6,08	-60,8	-0,6	-456	-8,82
70	30	0,3	-0,709	-7,09	-70,9	-0,7	-532	-10,28
80	20	0,2	-0,811	-8,11	-81,1	-0,8	-608	-11,75
90	10	0,1	-0,912	-9,12	-91,2	-0,9	-684	-13,22



# **technische import**

Nijverheidsweg 11  
7005 AS Doetinchem  
T. +31 (0) 314-344342  
E. [info@bafa.nl](mailto:info@bafa.nl)

**BAFA.NL**