



technische import

Productinformatie



A.U.K. MÜLLER GMBH & CO. KG

BAFA.NL

Product Information

2/2-way drain valves NC, DN 40, IP 65, IP 68



A. u. K. Müller

Solenoid valves
Control valves
Special valves and systems

A. u. K. Müller GmbH & Co. KG
Dresdener Str. 162
D-40595 Düsseldorf/Germany

Tel.: +49(0)211-7391-0
Fax: +49(0)211-7391-281

e-mail: info@akmueller.de
Internet: www.akmueller.de

Series 04.040.116



Valve body: PPE



Valve body: PVDF



Valve body: Stainless steel

Characteristics

- Direct acting
- Protection type IP 68 using cable, respectively IP 65 using connector
- Normally closed (NC)
- Potted coil
- Coil system protected against corrosion by separation from medium by membrane
- Optional valve body made of PVDF or stainless steel and FKM membrane for higher resistance to chemicals
- Optional flush spout on valve body
- Optional manual emergency override
- Long term performance capability
- Maximum medium temperature 98 °C (208 °F)
- No minimal pressure required
- Suitable for spray- and jet water
- UL approved versions available
- High operating safety by the use of high quality materials and 100% final testing of the products

Description

2/2-way direct acting drain valve of nominal diameter DN 40 for controlling low aggressive liquid media, such as cleaning or disinfection agents, with normally closed operation mode NC (normally closed).

Valves of this type are medium separated having a single chamber valve body with the inlet at ninety degrees to the outlet. They can be manufactured in various materials and equipped with threaded or hose connections. Electrical operating safety is achieved by insulation class F and supported by an integrated protective circuit.

Protection type IP 68 is achieved in conjunction with cable connection, IP 65 by using a mounted connector.

The valves can be equipped with an emergency manual override, to ensure the drainage of tanks even in the case of a voltage breakdown.


Valve housing made of PPE or stainless steel is suitable for hot water. Valve housing made of PVDF have a higher resistance to chemicals whereas stainless steel has both features.

The smooth internal shape improves liquid flow and avoids dirt traps. The valve bodies can be equipped with an additional flush spout.

Applications

- Industrial washing machines and dishwashers
- Cleaning devices for medical equipment
- Cleaning and disinfection systems in the dairy industry and process engineering

Typical performance curve

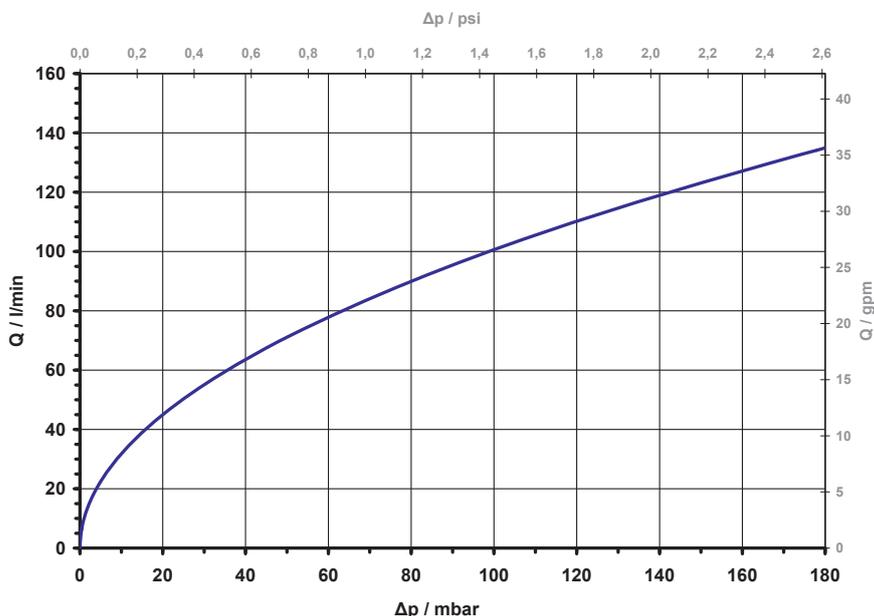

Product Information

2/2-way drain valves NC, DN 40, IP 65, IP 68



A. u. K. Müller

Series 04.040.116



Valve body: PPE




Valve body: PVDF




Valve body: Stainless steel

Optional flush spout

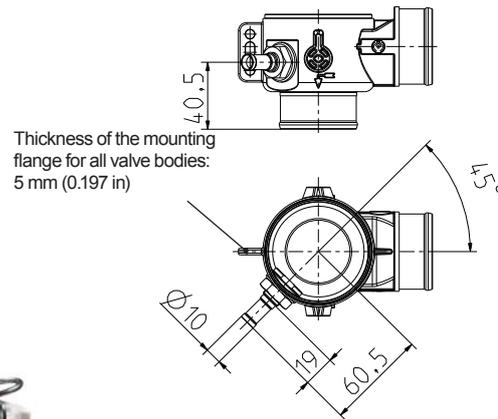

Thickness of the mounting flange for all valve bodies: 5 mm (0.197 in)




Technical Data

Type	drain valve	
Construction	2/2-way-solenoid valve, direct acting	
Function	NC (normally closed)	
Fitting position	Solenoid pointing upwards (horizontally on demand)	
Media	low aggressive media, such as cleaning or disinfection agents within potable water	
T-Medium		
PPE	98 (208)	°C (°F) max.
Stainless steel	98 (208)	°C (°F) max.
PVDF	50 (122)	°C (°F) max. (USA)
T-Ambient	60 (140)	°C (°F) max.
DN	40 (1.575) mm (in)	
p-Operating	0 - 120	mbar
on request	0 - 180	mbar (not for USA)
	(0 - 2.61)	(psi)
Coil type	MS.010 integrated protection circuit (high voltage peak limitation) and rectifier	
Nominal voltage	12	V DC
	24	V DC
	24	V AC/DC *)
	110	V AC/DC
	200-240	V AC/DC
	400	V AC/DC
Voltage tolerance	±10%	
Duty cycle	100 %	
Nominal power	24	W
Protection Type	IP 68	With cable according to EN 60529
	IP 65	With plug socket according to EN 175301-803
Insulation class	F	According to EN 60730
Protection class	I	According to EN 60730 (for incorporation in class I)

Materials

Valve body	PPE, PVDF, stainless steel
Plunger guide	Stainless steel
Plunger and spring	Stainless steel
Flush spout	Stainless steel
Membrane and sealings	EPDM FKM
Coil coating	PBT PU potting

The combination of stainless steel valve body and FKM diaphragm is particularly recommended for use in sterilization and disinfection equipment.

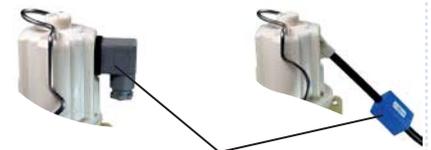

*) Exception:

Depending on the required connection type, the rectifier for version 24 V AC/DC is located within a grey plug or within a sealed housing in line with the cable.

	KL
standard cable length (IP 68 only)	1000 mm (39.370 in)
other cable length on request	

Product Information

2/2-way drain valves NC, DN 40, IP 65, IP 68







A. u. K. Müller

without emergency manual override

Series 04.040.116

Options								
Material	Ø A	A1	Ø B	B1	L	H	H	T
PPE / PVDF	G 1 1/2		G 1 1/2					
	G 1 1/2	21	nozzle 1 1/2"	21	117	170	190	91
	nozzle 1 1/2"	(0.827 in)	G 1 1/2	(0.827 in)	(4.606 in)	(6.693 in)	(7.480 in)	(3.583 in)
	nozzle 1 1/2"		nozzle 1 1/2"					

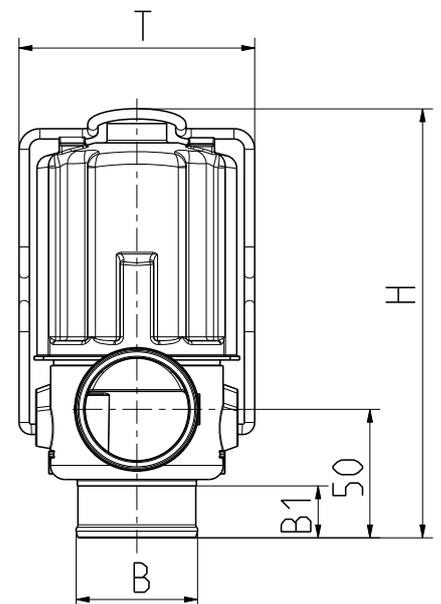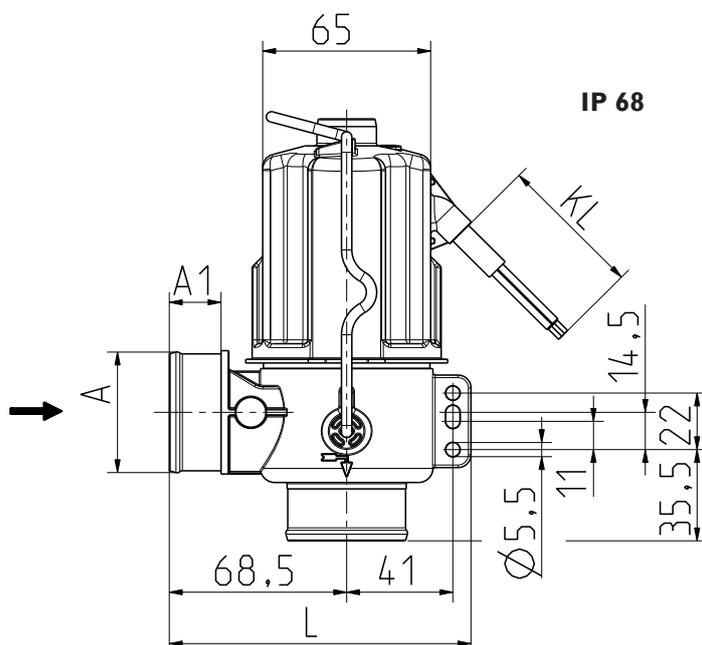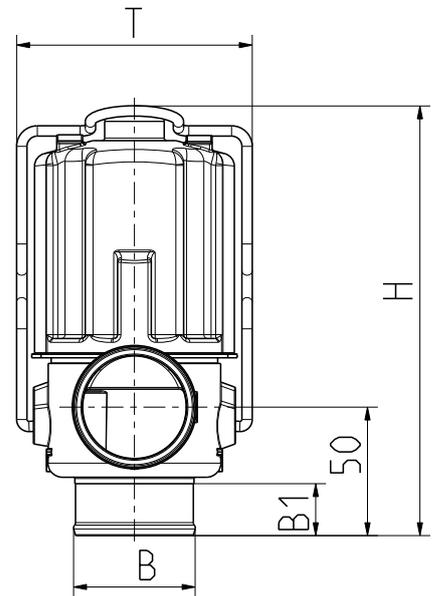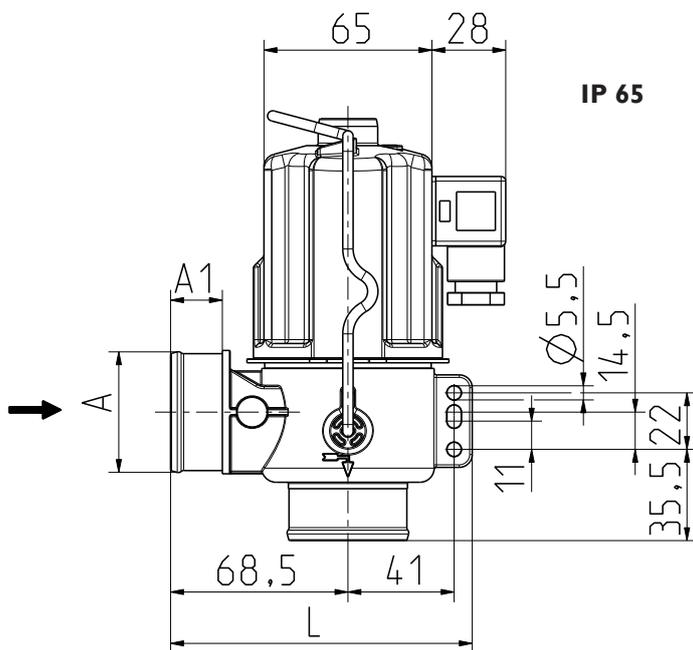

Product Information

2/2-way drain valves NC, DN 40, IP 65, IP 68








A. u. K. Müller

Series 04.040.116

with emergency manual override

Pull ball handle to open the valve

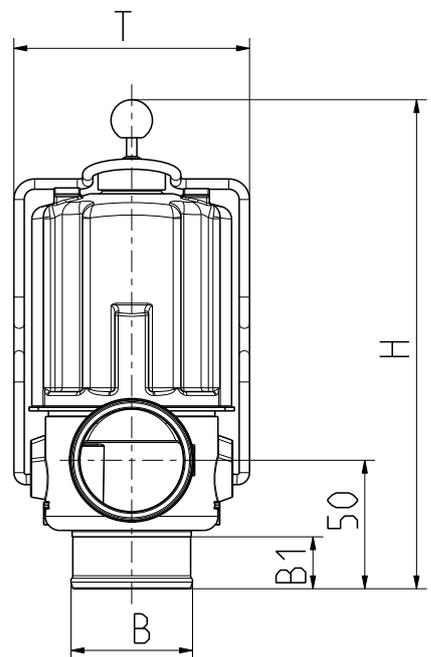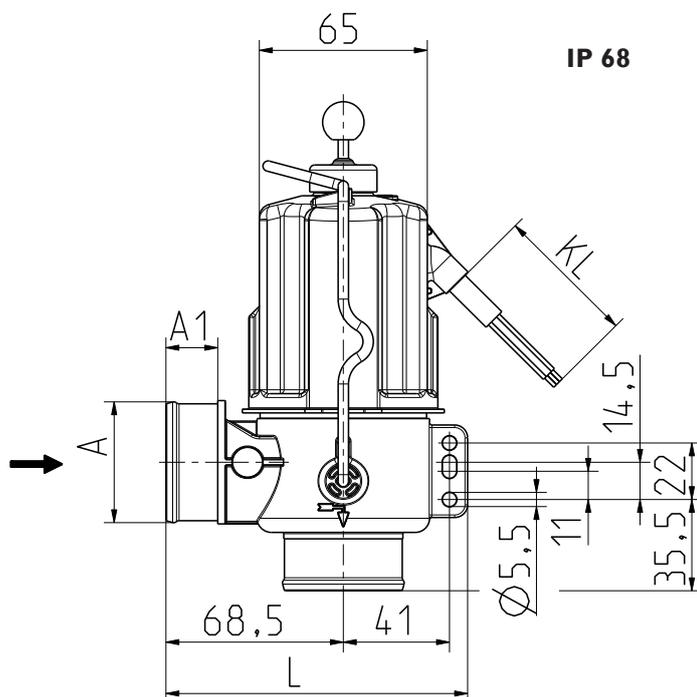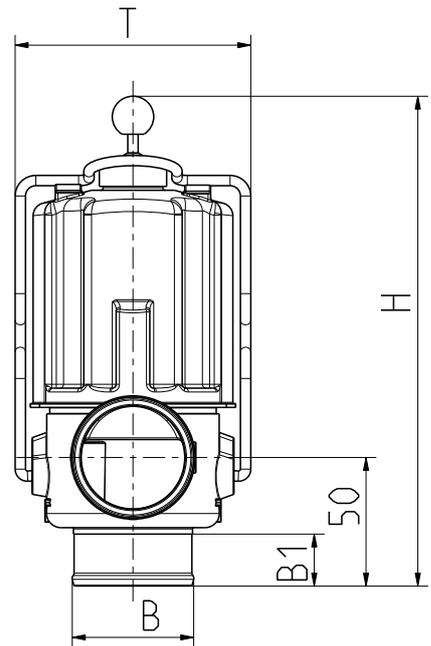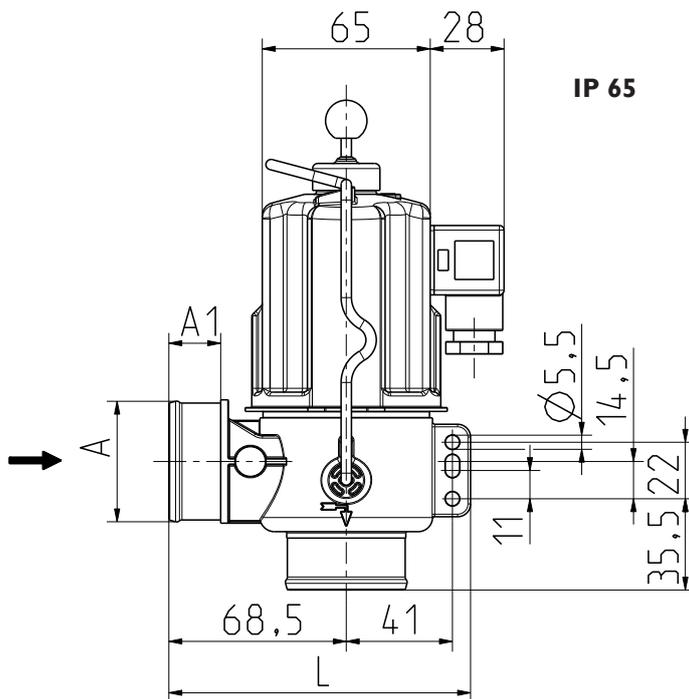







Series 04.040.116

without emergency manual override



Options								
Material	Ø A	A1	Ø B	B1	L	H	H	T
						Without emergency manual override	With emergency manual override	
Stainless steel	G 1 1/2	21	G 1 1/2	21	117	168	188	91
Stainless steel	G 1 1/2	21	nozzle 1 1/2"	21	117	168	188	91
Stainless steel	nozzle 1 1/2"	21	G 1 1/2	21	117	168	188	91
Stainless steel	nozzle 1 1/2"	21	nozzle 1 1/2"	21	117	168	188	91

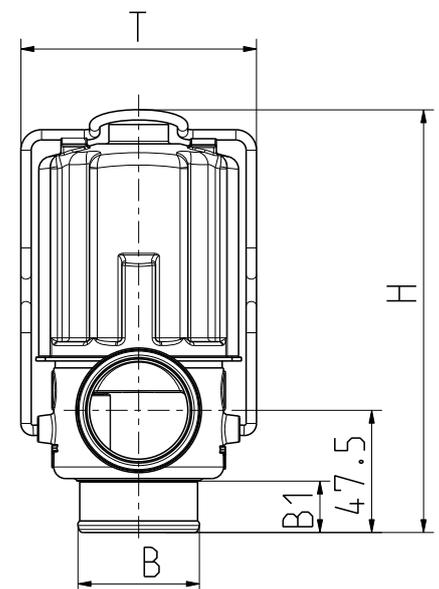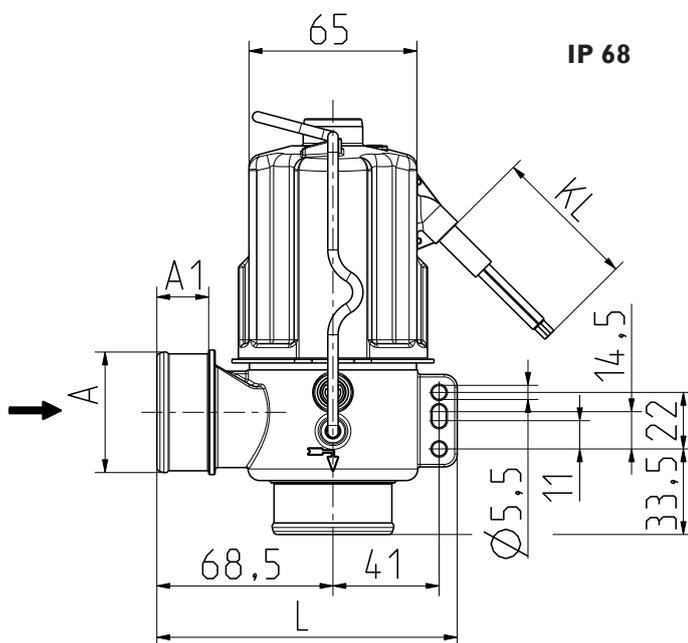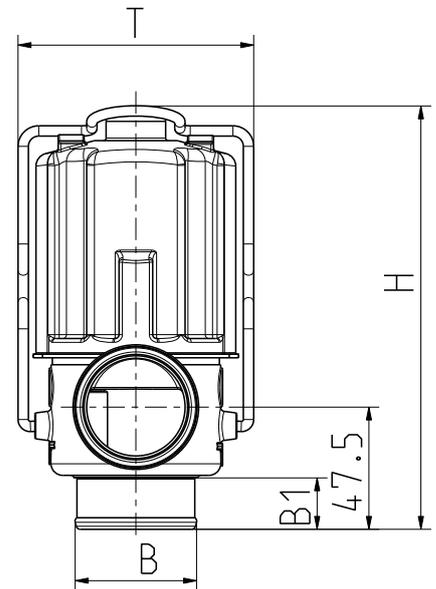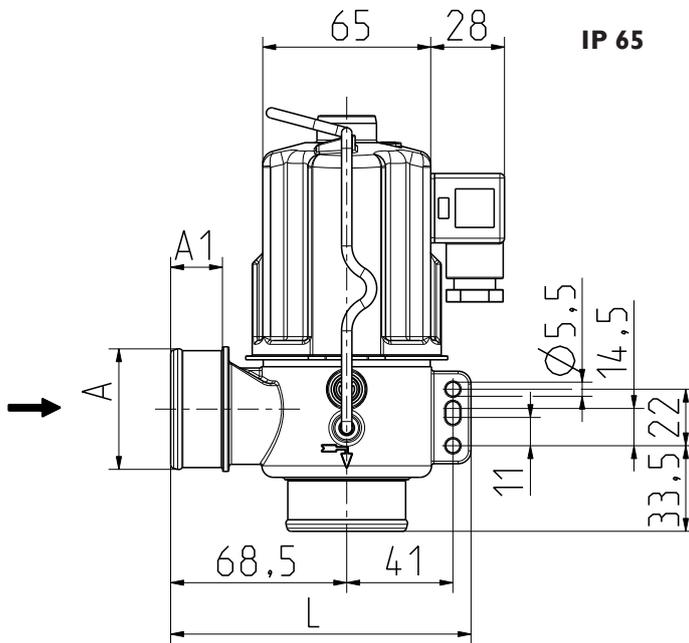

Product Information

2/2-way drain valves NC, DN 40, IP 65, IP 68




A. u. K. Müller



Series 04.040.116

with emergency manual override


Pull ball handle to open the valve

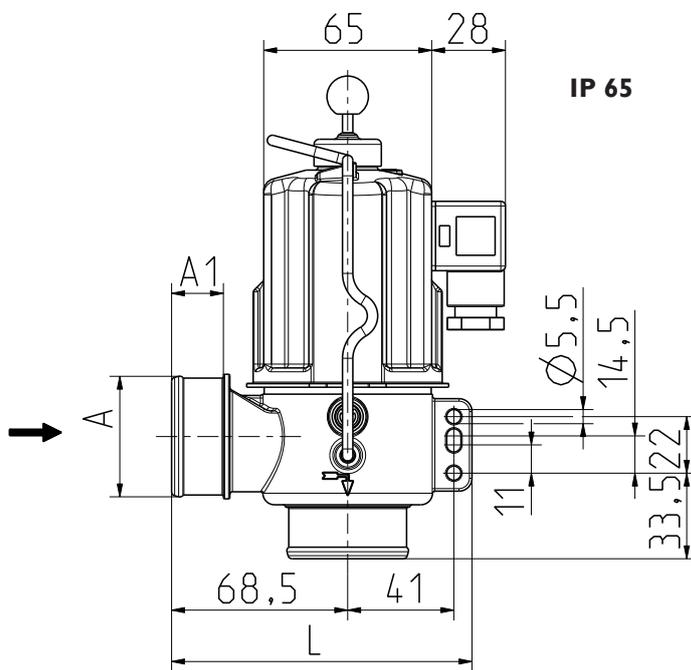


IP 65

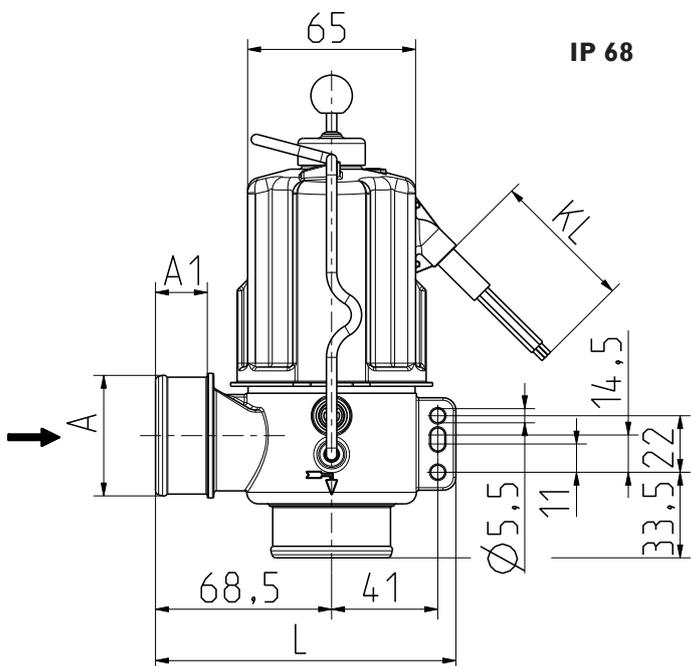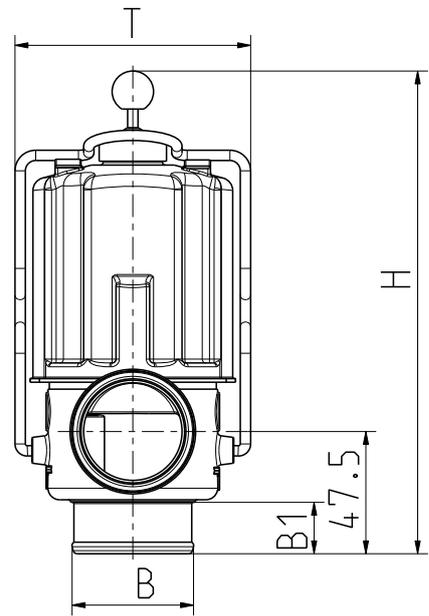

IP 68

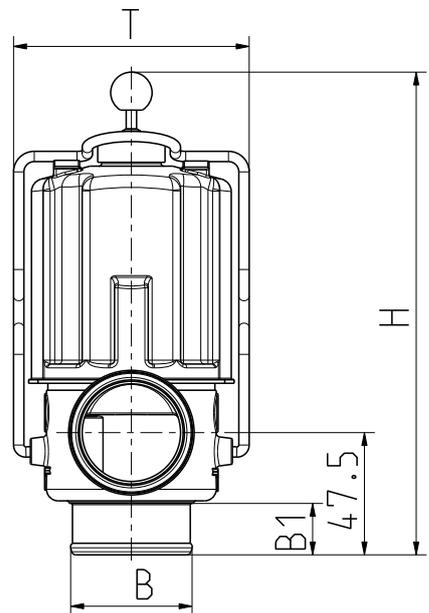

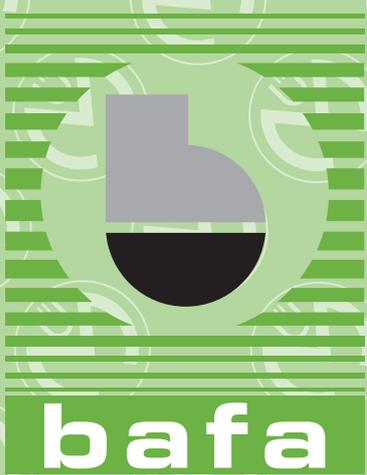

technische import

Nijverheidsweg 11
7005 AS Doetinchem
T. +31 (0) 314-344342
E. info@bafa.nl

BAFA.NL