



technische import

Productinformatie



A.U.K. MÜLLER GMBH & CO. KG

BAFA.NL



Solenoid valves
Control valves
Special valves and systems

A.u.K. Müller GmbH & Co. KG
Dresdener Str. 162
D-40595 Düsseldorf/Germany

Tel.: +49(0)211-7391-0
Fax: +49(0)211-7391-281

e-mail: info@akmueller.de
Internet: www.akmueller.de

Series 04.040.916



Valve body: PPE



Valve body: PVDF



Valve body: Stainless steel

Characteristics

- Direct acting
- Protection type IP 68 using cable, respectively IP 65 using connector
- Normally open (NO)
- Potted coil
- Coil system protected against corrosion by separation to medium by membrane
- Optional valve body made of PVDF or stainless steel and FKM membrane for higher resistance to chemicals
- Optional flush spout on valve body
- Long term performance capability
- Maximum medium temperature 98 °C (208 °F)
- No minimal pressure required
- Suitable for spray- and jet water
- UL approved versions available
- High operating safety by the use of high quality materials and 100% final testing of the products

Description

2/2-way direct acting dump valve of nominal diameter DN 40 for controlling low aggressive media, such as cleaning or disinfection agents, direct acting with normally open operation mode NO (normally open).

Valves of this type are medium separated having a single chamber valve body with the inlet at ninety degrees to the outlet. They can be manufactured in various materials and equipped with threaded or hose connections. Electrical operating safety is achieved by insulation class F and supported by an integrated protective circuit.

Protection type IP 68 is achieved in conjunction with cable connection, IP 65 by using a mounted connector.


Valve housing made of PPE or stainless steel are suitable for hot water. Valve housing made of PVDF have a higher resistance to chemicals where stainless steel has both features.

The smooth internal shape improves liquid flow and avoids dirt traps. The valve bodies can be equipped with an additional flush spout.

Applications

- Industrial washing machines and dishwashers
- Cleaning devices for medical equipment
- Cleaning and disinfection systems in the dairy industry and process engineering

Typical performance curve

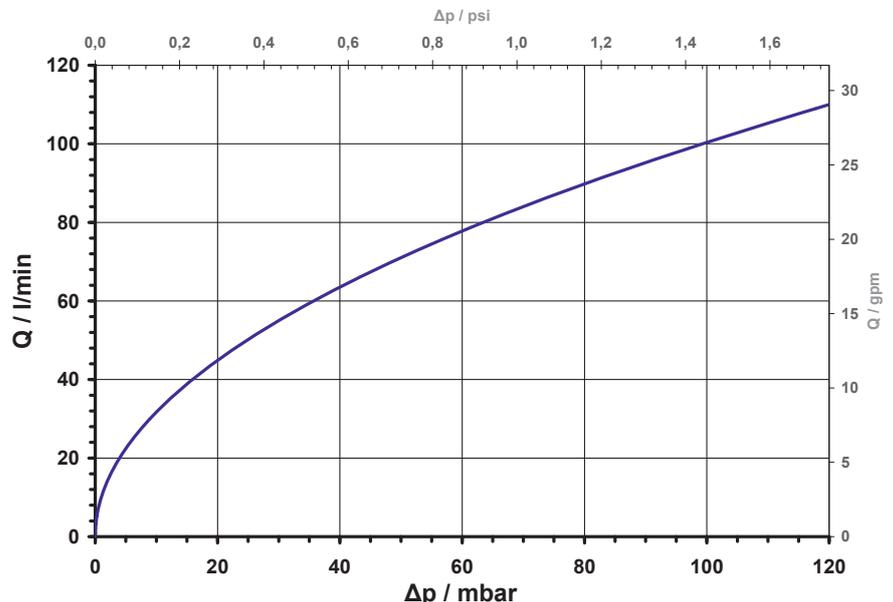

Product Information

2/2-way drain valves NO, DN 40, IP 65, IP 68



A. u. K. Müller

Series 04.040.916

Optional flush spout

Technical Data




Valve body: PPE




Valve body: PVDF



Valve body: Stainless steel

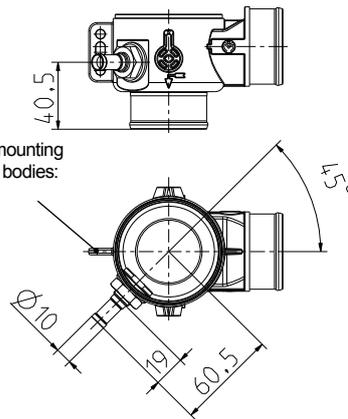


Thickness of the mounting flange for all valve bodies: 5 mm (0.197 in)



Materials	
Valve body	PPE, PVDF, stainless steel
Plunger guide	Stainless steel
Plunger and spring	Stainless steel
Flush spout	Stainless steel
Membrane and sealings	EPDM FKM
Coil coating	PBT PU potting

The combination of stainless steel valve body and FKM membrane is particularly recommended for use in sterilization and disinfection equipment.

Type	Drain valve	
Construction	2/2-way-solenoid valve, direct acting	
Function	NO (normally open)	
Fitting position	Solenoid pointing upwards	
Media	low aggressive media, such as cleaning or disinfection agents within potable water	
T-Medium		
PPE	98 (208)	°C (°F) max.
Stainless steel	98 (208)	°C (°F) max.
PVDF	50 (122)	°C (°F) max.
T-Ambient	60 (140)	°C (°F) max.
DN	40 (1.575) mm (in)	
p-Operating	0 - 120	mbar (psi)
Coil type	MS.010 integrated protection circuit (high voltage peak limitation) and rectifier	
Nominal voltage	12	V DC
	24	V DC
	24	V AC/DC *)
	110	V AC/DC
	200-240	V AC/DC
	400	V AC/DC
Voltage tolerance	±10%	
Duty cycle	100 % 50 % of 10 min. at 400 V AC/DC	
Nominal power	24	W
Protection Type	IP 68	With cable according to EN 60529
	IP 65	With plug socket according to EN 175301-803
Insulation class	F	According to EN 60730
Protection class	I	According to EN 60730 (for incorporation in class I)

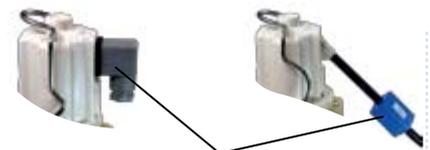

*) Exception:

Depending on the required connection type, the rectifier for version 24 V AC/DC is located within a grey plug or within a sealed housing in line with the cable.


	KL
Standard cable length (IP 68 only)	1000 mm (39.370 in)
Other cable length on request	





Series 04.040.916

Options


Material	Ø A	A1	Ø B	B1	L	H	T
PPE / PVDF	G 1 1/2	21 (0.827 in)	Nozzle 1 1/2"	21 (0.827 in)	117 (4.606 in)	170 (6.693 in)	91 (3.583 in)
	G 1 1/2		G 1 1/2				
	Nozzle 1 1/2"		Nozzle 1 1/2"				
	Nozzle 1 1/2"		G 1 1/2				

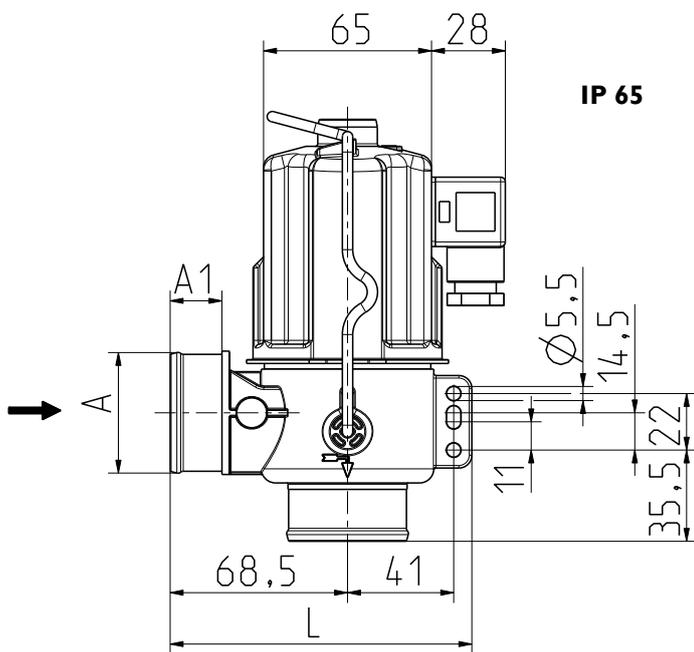

IP 65

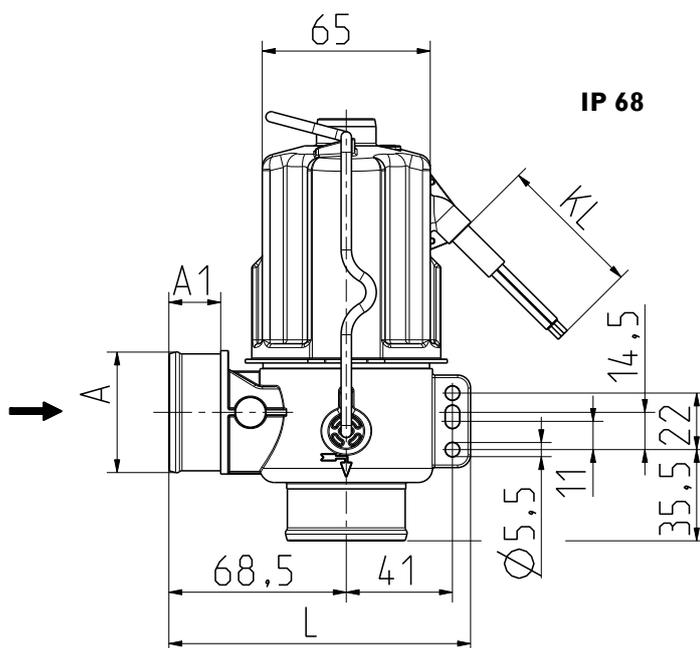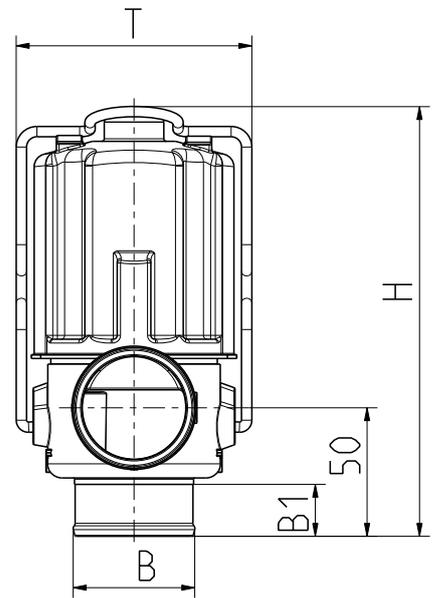

IP 68


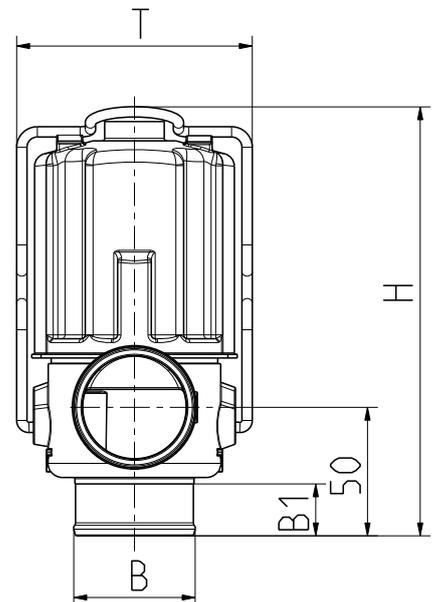





Series 04.040.916

Options

Material	Ø A	A1	Ø B	B1	L	H	T
Stainless steel on request	G 1 1/2		G 1 1/2				
	G 1 1/2	21 (0.827 in)	nozzle 1 1/2"	21 (0.827 in)	117 (0.669 in)	168 (6.614 in)	91 (3.583 in)
	nozzle 1 1/2"		G 1 1/2				
	nozzle 1 1/2"		nozzle 1 1/2"				

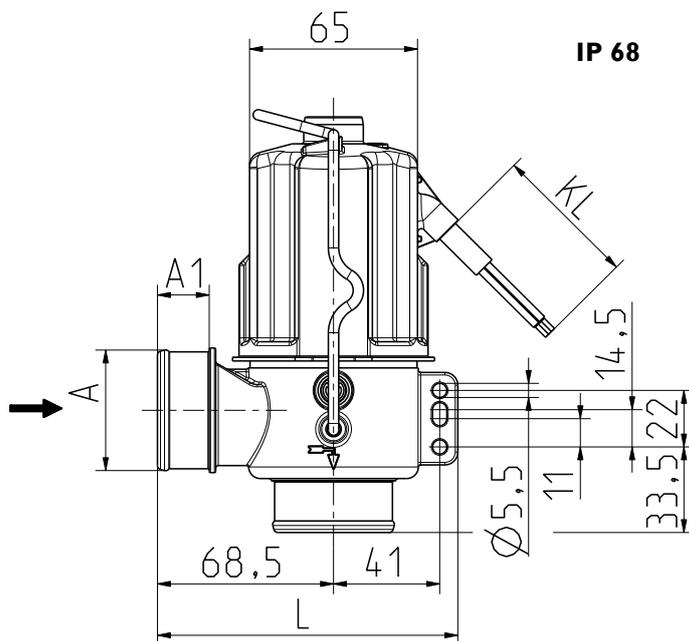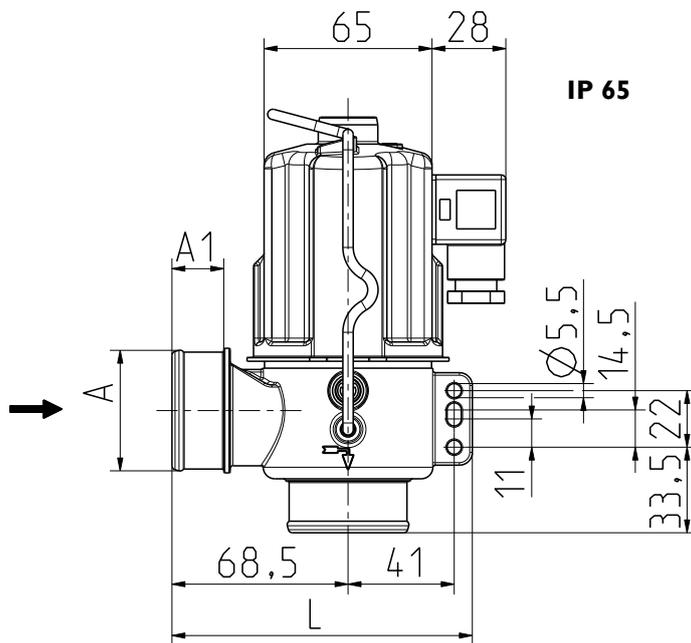

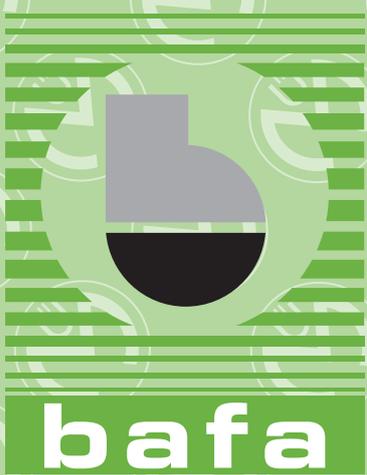

technische import

Nijverheidsweg 11
7005 AS Doetinchem
T. +31 (0) 314-344342
E. info@bafa.nl

BAFA.NL