




**technische import**

# Produkt informatie



**FRATELLI PETTINAROLI SPA**

[www.bafa.nl](http://www.bafa.nl)

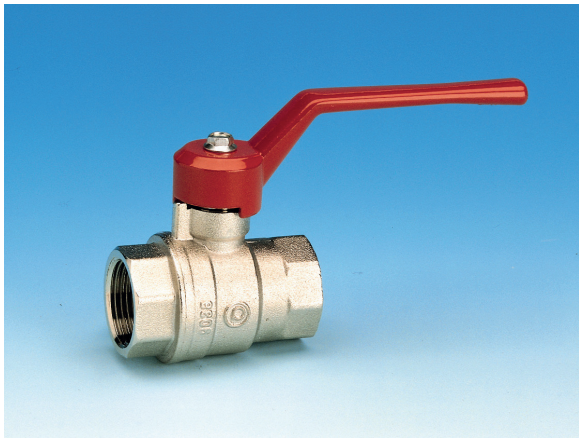


## DESCRIPTION

### 50CE

F x F extra compact fullway ball valve.  
Red aluminum lever.

Conform to **EN 13828**

## DIMENSIONS

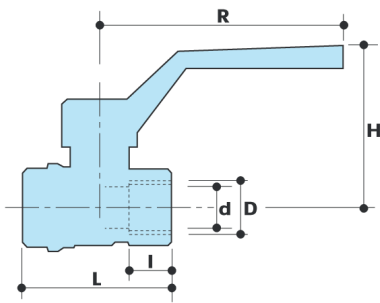

D	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
d	15	20	25	32	40	50
H	54	63.5	66	80.5	100	107
I	12	13	14	16.5	17.5	19
L	47.4	58	68	81	93.5	109
R	82	95	95	120	150	150
Accessory type	1	2	2	3	4	4
Weight (g)	160	270	430	790	980	1450

All threads are conform to ISO 7 or ISO 228 standards

## MATERIALS

<b>Body</b>	CW617N (DIN 50930 part.6) CuZn40Pb2
<b>Ball</b>	CW617N (DIN 50930 part.6) CuZn40Pb2 Chrome plated
<b>Stem</b>	CW614N (DIN 50930 part.6) CuZn39Pb3
<b>Gland</b>	CW614N (DIN 50930 part.6) CuZn39Pb3
<b>Seat</b>	2 x PTFE
<b>O-rings</b>	2 x FKM
<b>Lever</b>	red aluminum lever

## CONNECTION VARIANTS

50CE	F X F, red aluminum lever
50CE/1	F X M, red aluminum lever
50CE/2	M X M, red aluminum lever


## HANDLE VARIANTS

50CE	red aluminum lever
51CE	red steel lever
52CE	red butterfly handle
52CET	extended plastic lever

## APPROVALS




## PRESSURE DROP DIAGRAM

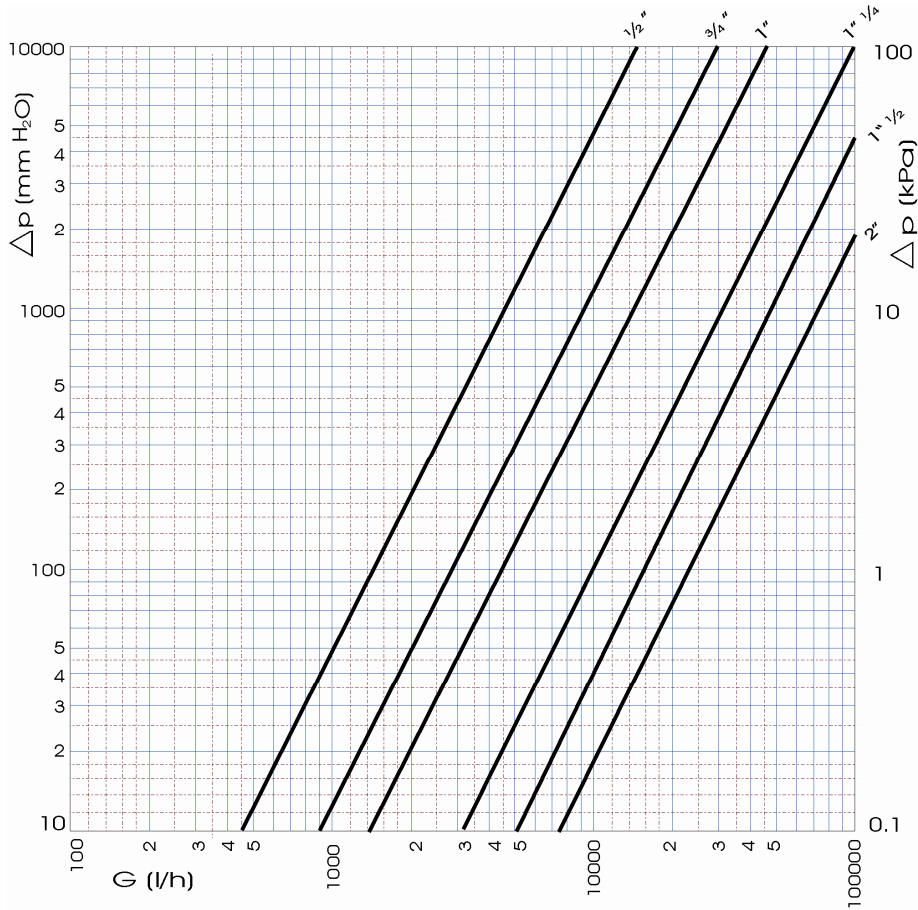

Dim.	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
Kv	14.5	30	45	97	150	220
PN	28	28	28	20	20	20

## RECOMMENDED WORKING TEMPERATURE/ PRESSURE LIMIT

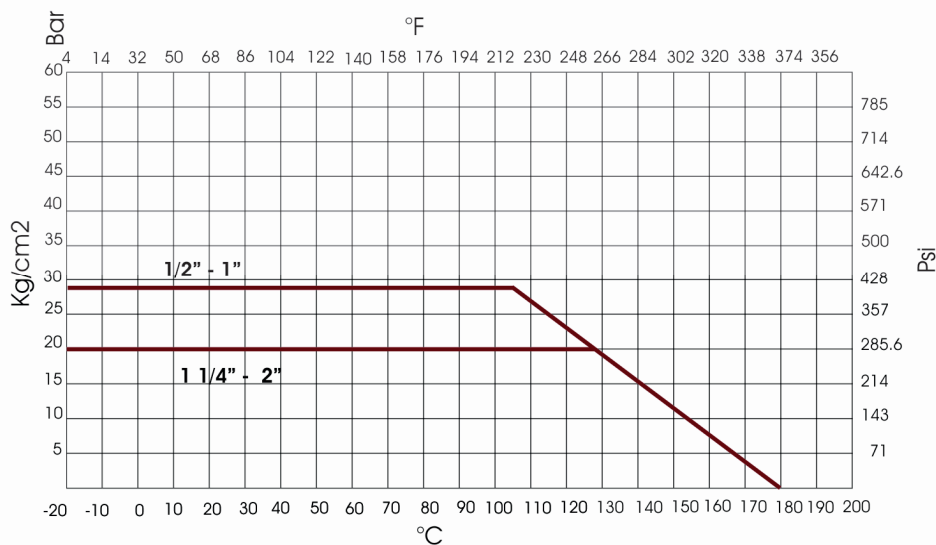

**28 bar - 100°C - non shock (1/2" - 1")**  
**10 bar - 150°C - non shock**