




technische import

Produkt informatie



FRATELLI PETTINAROLI SPA

www.bafa.nl

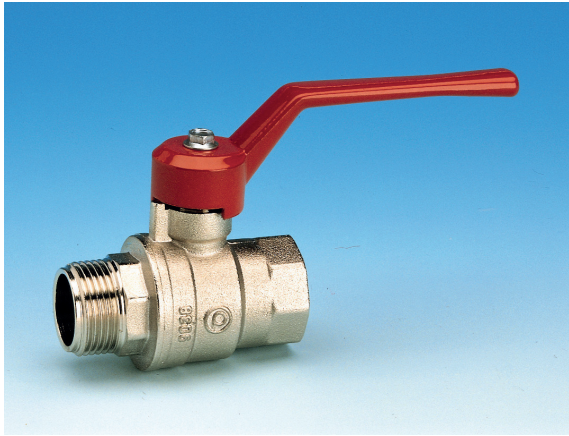


DESCRIPTION

50CE/1

F x M extra compact fullway ball valve.
Red aluminum lever.

Conform to **EN 13828**

DIMENSIONS

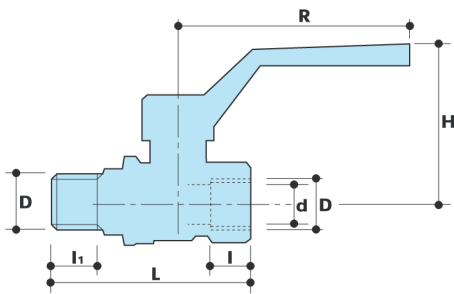

D	1/2"	3/4"	1"
d	15	20	25
H	54	63.5	66
I	12	13	14
I1	12	13	14
L	54.7	66.5	76
R	82	95	95
Accessory type	1	2	2
Weight (g)	180	290	450

All threads are conform to ISO 7 or ISO 228 standards

MATERIALS

Body	CW617N (DIN 50930 part.6) CuZn40Pb2
Ball	CW617N (DIN 50930 part.6) CuZn40Pb2 Chrome plated
Stem	CW614N (DIN 50930 part.6) CuZn39Pb3
Gland	CW614N (DIN 50930 part.6) CuZn39Pb3
Seat	2 x PTFE
O-rings	2 x FKM
Lever	red aluminum lever

CONNECTION VARIANTS

50CE	F X F, red aluminum lever
50CE/1	F X M, red aluminum lever
50CE/2	M X M, red aluminum lever


HANDLE VARIANTS

50CE	red aluminum lever
51CE	red steel lever
52CE	red butterfly handle
52CET	extended plastic lever

APPROVALS




PRESSURE DROP DIAGRAM

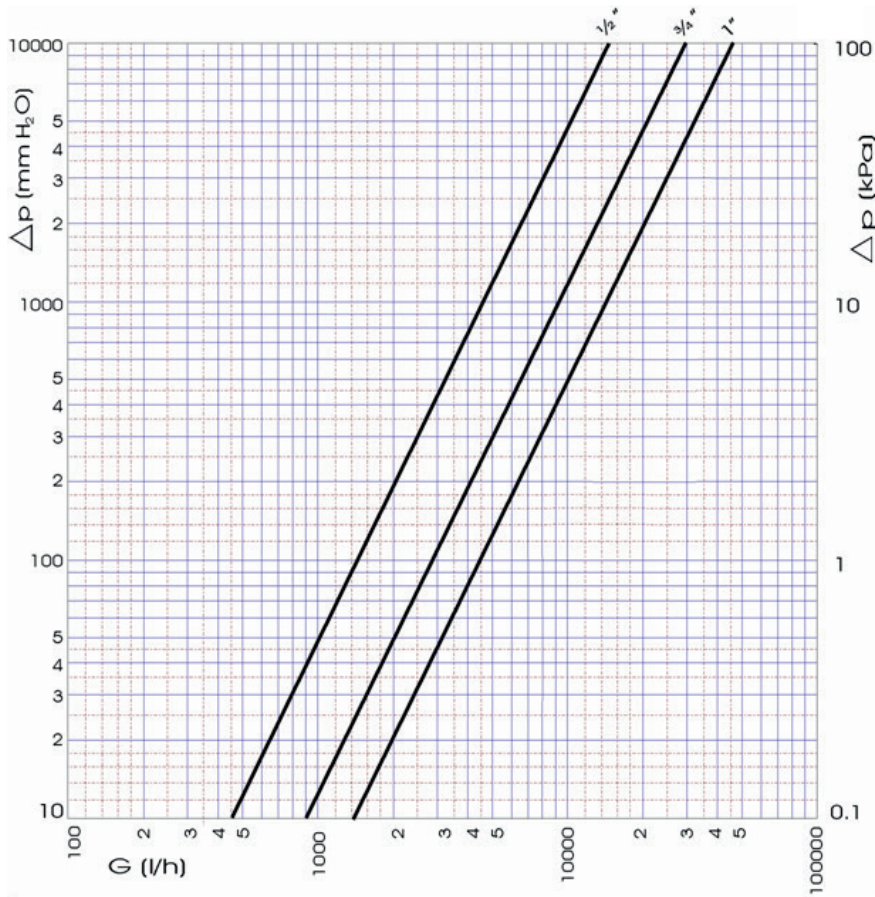

Dim.	1/2"	3/4"	1"
Kv	14.5	30	45
PN	28	28	28

RECOMMENDED WORKING TEMPERATURE/ PRESSURE LIMIT

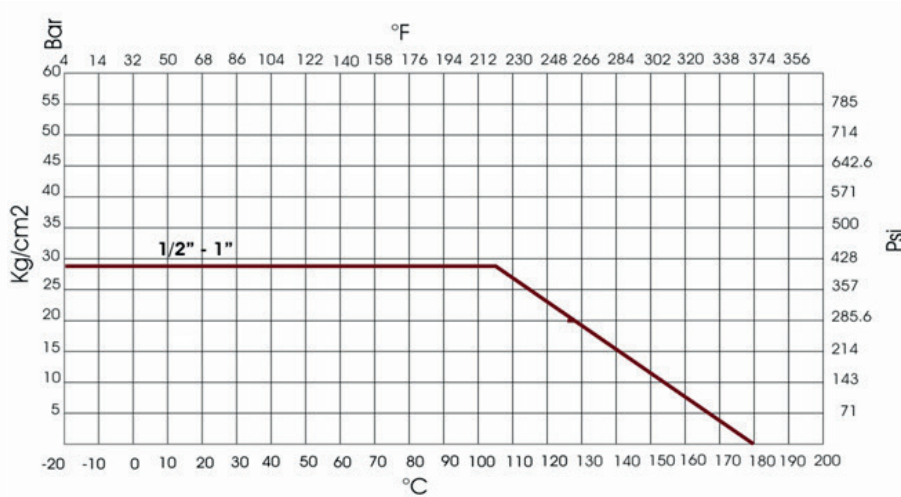

28 bar - 100°C - non shock (1/2" - 1")

10 bar - 150°C - non shock