



**technische import**

# Productinformatie



FRATELLI PETTINAROLI

**BAFA.NL**




## DESCRIPTION

# 51/3

F x Tail Piece heavy duty full-flow ball valve. Nickel plated.  
Reversible red steel handle.

Conform to **EN 13828**

## DIMENSIONS

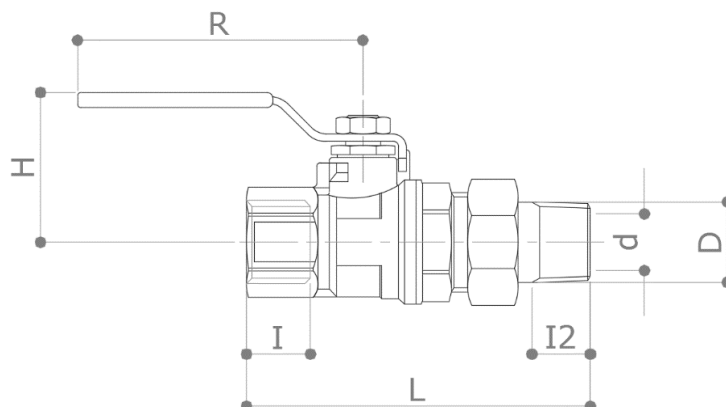

D	½" x ½"	¾" x ¾"	1" x 1"	1 ¼" x 1 ¼"
d	15	20	25	32
H	39	49	61	66
I	17	18	21.5	23.5
I2	13	14	16	18.5
L	93	105	119	135
R	75	95	120	120
<b>Weight [g]</b>	315	510	860	1305

Dimensions in **mm**

All threads are conform to ISO 7 or ISO 228 standards


## MATERIALS

<b>Body</b>	CW617N (EN 12165) CuZn40Pb2
<b>Ball</b>	CW617N (EN 12165) CuZn40Pb2 Chrome plated
<b>Stem</b>	CW614N (EN 12164) CuZn39Pb3
<b>Stuffing box</b>	CW614N (EN 12164) CuZn39Pb3 Adjustable
<b>Nut</b>	CW617N (EN 12165) CuZn40Pb2
<b>Tail</b>	CW617N (EN 12165) CuZn40Pb2
<b>Seat</b>	2 x PTFE + 1 x PTFE seal on the stem
<b>O-Rings</b>	2 x FKM
<b>Handle</b>	Delta Protect coated steel. PVC grip with "Pad printing"

## APPROVALS




**PRESSURE DROP DIAGRAM**

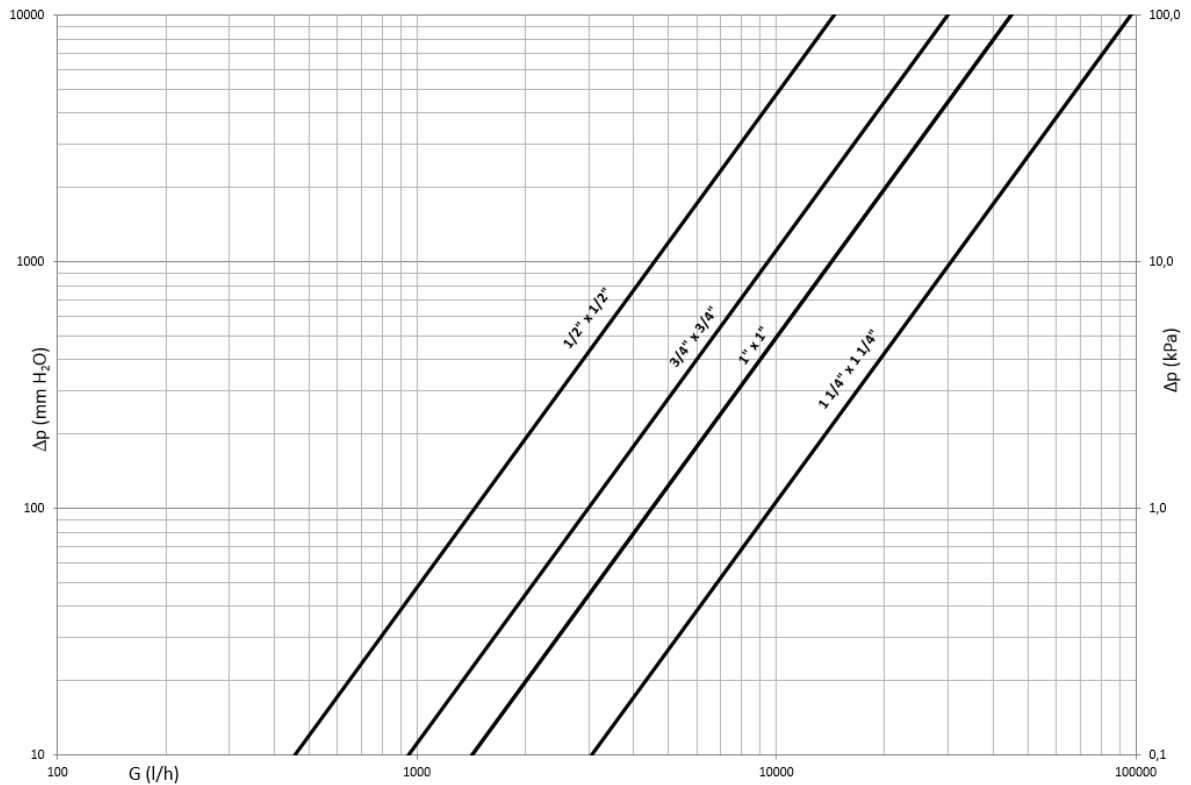

Dim.	½" x ½"	¾" x ¾"	1" x 1"	1 ¼" x 1 ¼"
Kv	14.5	30	45	97
PN	30	30	30	30

**TEMPERATURE / PRESSURE DIAGRAM**

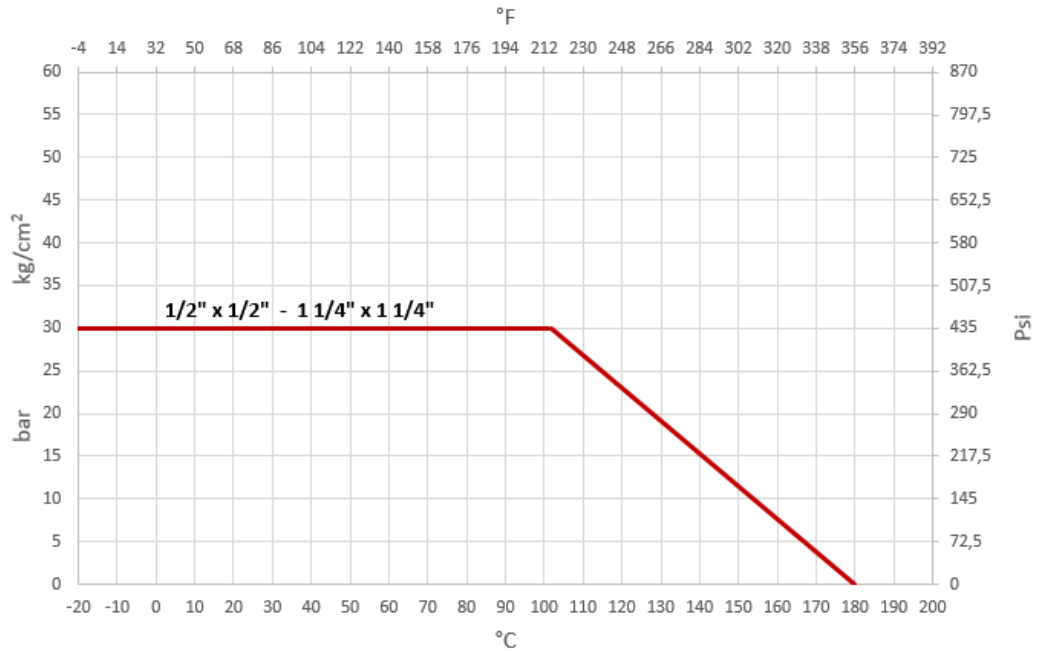

**RECOMMENDED WORKING TEMPERATURE/PRESSURE LIMITS**

- 30 bar – 100°C – non shock
- 10 bar – 150°C – non shock



# **technische import**

Nijverheidsweg 11  
7005 AS Doetinchem  
T. +31 (0) 314-344342  
E. [info@bafa.nl](mailto:info@bafa.nl)

**BAFA.NL**