



technische import

SUCO Productinformatie

0340



SUCO Robert Scheuffele GmbH & Co. KG

www.bafa.nl

M.8


ATEX

0340 / 0341

Diaphragm / piston pressure switches up to 250 V


ATEX CE II 3D IP65 T90°C (dust protection zone 22)

- Zinc-plated steel housing (CrVI-free), with anodised aluminium protective cap
- Changeover with silver contacts
- Operation voltage up to 250 V, protection class 2, protective insulation \square
- Overpressure safety up to 300 / 600 bar¹⁾

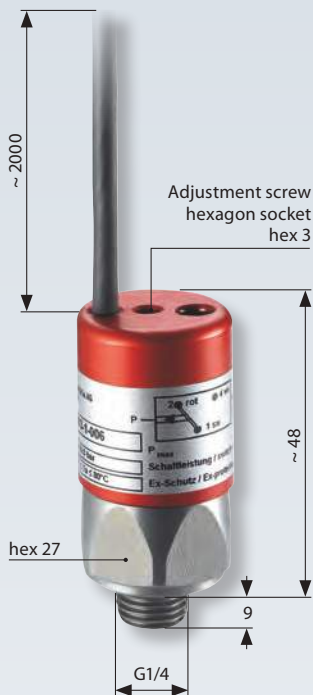

Contact assignment:

- 1 = black
- 2 = red
- 4 = white



$P_{\max.}$ in bar	Adjustment range in bar	Tolerance in bar at room temperature	Thread	Order number
-----------------------	----------------------------	---	--------	--------------

0340 Diaphragm pressure switches

300 ¹⁾	0.3 – 1.5	± 0.2	G 1/4	0340 – 457 03 – X – 003
	1 – 10	$\pm 0.5 - 1.0$		0340 – 458 03 – X – 006
	10 – 20	± 1.0		0340 – 459 03 – X – 009
	20 – 50	± 2.0		0340 – 461 03 – X – 012

0341 Piston pressure switches

600 ¹⁾	50 – 150	± 5.0	G 1/4	0341 – 460 03 – X – 003
-------------------	----------	-----------	-------	-------------------------

Seal material – Application areas

NBR	Hydraulic/machine oil, heating oil, air, nitrogen, etc.	1
EPDM	Brake fluid, hydrogen, oxygen, acetylene, etc.	2
FKM	Hydraulic fluids (HFA, HFB, HFD), petrol/gasoline, etc.	3

Refer to page 82 for the temperature range and application thresholds of sealing materials



Your order number:

034X – XXX 03 – X – XXX

Piston pressure switches only have limited suitability for use with gases (refer to Page 14 for explanations).

¹⁾ Static value. Dynamic value is 30-50 % lower. Values pertain to the hydraulic/pneumatic part of the pressure switch.



technische import

www.bafa.nl