



technische import

Produkt informatie

COSTER

COSTER T.E.

TWO PORT RADIATOR BALL VALVES

PN 10 ; 5...120 °C

HGT ... Eng.



- Body in nickel-plated brass and ball in chromed brass
- Female threaded input connection
- "Rafit" with male threaded tang to radiator output connection
- Teflon and Viton seals



1. APPLICATION

HGT valves are designed to control water flow in heating system. They are particularly suitable for replacing taps on radiators. They can be operated by hand or by rotary actuators model CDR.

Permitted fluids:

- hot water max. 120 °C,
- water with max. 50 % glycol.

2. MODELS


Code	DN body mm	Valve connection input	Valve connection output	Radiator tang	Kvs ⁽¹⁾ m ³ /h	Suitable actuator CDR ...
throughport		female	rafit	male		kPa ⁽²⁾ (bar) sec. ⁽³⁾
HGT 110	10	3/8"	1/2"	3/8"	5.4	600 (6) 60
HGT 115	15	1/2"	3/4"	1/2"	6	600 (6) 60
HGT 120	20	3/4"	1"	3/4"	11	600 (6) 60
HGT 125	25	1"	1 1/4"	1"	25.7	600 (6) 60
bypass						
HGT 210	10	3/8"	1/2"	3/8"	2.4	600 (6) 60
HGT 215	15	1/2"	3/4"	1/2"	2.6	600 (6) 60
HGT 220	20	3/4"	1"	3/4"	5	600 (6) 60
HGT 225	25	1"	1 1/4"	1"	11.7	600 (6) 60

(1) Kvs = flow coefficient : flow in m³/h with valve open and pressure drop of 100 kPa.

(2) kPa = maximum differential pressure Δp permitted by actuator: 100 kPa = 10 mWG = 1 bar

(3) sec. = time necessary for actuator to make complete valve run.

3. TYPICAL APPLICATION DIAGRAMS


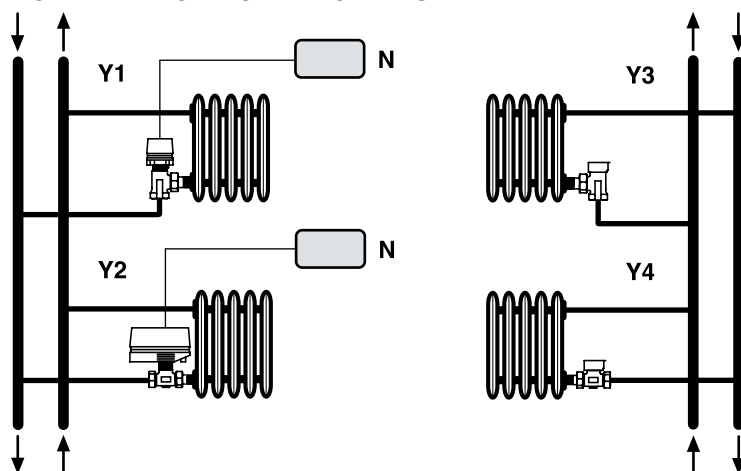


N – Ambient controller
 Y1 – HGT 2.. valve with CDR... actuator
 Y2 – HGT 1.. valve with CDR... actuator
 Y3 – HGT 2.. valve with manual control
 Y4 – HGT 1.. valve with manual control

4. TECHNICAL DATA

Valve body	nickel plated OT58 brass	Connections :	
Spindle	stainless steel	- input	female threaded
Ball	hard chromed OT58 brass	- radiator	union with male threaded
Seals :		Nominal pressure	1000 kPa (10 bar)
• - ball	PTFE (teflon)	Fluid temperature	5...120 °C
- spindle	viton O-Ring	Run	90°

5. OVERALL DIMENSIONS

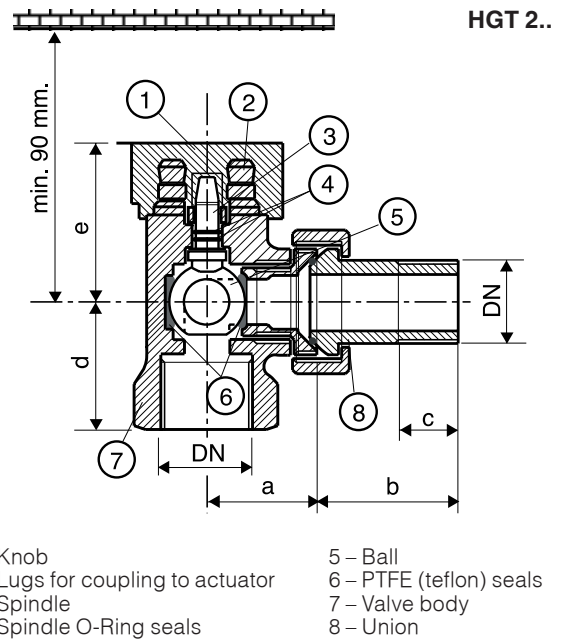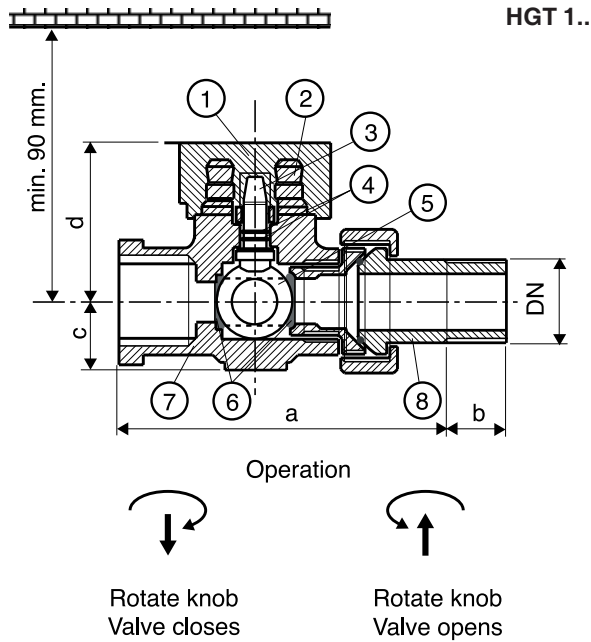

Model	DN inches	a mm	b mm	c mm	d mm
HGT 110	3/8"	71	9	16.5	36
HGT 115	1/2"	71	10	16.5	36
HGT 120	3/4"	74	12	20	41
HGT 125	1"	90	13	25	47

Model	DN inches	a mm	b mm	c mm	d mm	e mm
HGT 210	3/8"	25	24	9	26	36
HGT 215	1/2"	25.5	25.5	10	26	36
HGT 220	3/4"	26.5	28.5	12	52	41
HGT 225	1"	31	33	13	60	47


6. CONSTRUCTION

The valve body (5.7) is made in OT58 nickel-plated brass, the spindle (5.3) in stainless steel and the ball (5.5) in OT58 hard chromed brass.
 The ball is enclosed by two PTFE (teflon) seals (5.6) which ensure the total absence of let-by, while the spindle seal is ensured by two viton O-Rings (5.4).
 At the head of the valve there is a knob (5.1) for the manual control of the ball.

7. MOUNTING

7.1 Mounting of the valve

Before mounting the valve make sure that there isn't any extraneous matter in the pipework (remains of welding or threading). The pipework must not be subject to vibrations and must be perfectly aligned with the valve unions in order to avoid dangerous strains.
 The valve can be mounted in any position except with the spindle facing downwards.

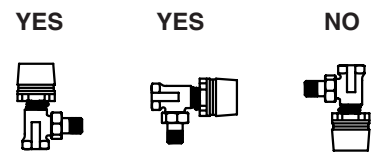

Leave enough space on the spindle side for the mounting of actuator (see section 5).

7.2 Installing the actuator on the valve

Set the valve in open position manually, pull out the hand grip from the valve and then insert and push down the CDR actuator (factory setting: "Open" position).

8. OPERATION

The valve operates with a 90° rotary movement.
 When the valve is open there is full bore with very low pressure drop, whereas when is closed the seals prevent any let-by.
 The valve can be operate by hand, using the hand grip, or by the CDR actuator.
 A mark on the valve spindle, also visible when the actuator is installed, indicates the position of the valve.