



technische import

Produkt informatie



www.bafa.nl

DISTRIBUTION TAPS YELLOW WITH HOSE FITTING

CONNECTIONS: MALE



HYDRAULIC FEATURES

The distribution taps are especially used on fountains installed outdoor, in gardens, parks or any location suitable for water supply where the user needs to be able to shut off the water flow. These taps are in many cases used as regular water distribution taps, installed directly to the wall. The distribution tap has a slow closure, which avoids possible water hammers and allows a precise control when increasing or decreasing water flow.

TECHNICAL FEATURES


Pressure:	
Maximum allowable working pressure (PN)	16 bar
Temperature:	
Working temperature limits (TS)	from 0°C (excluding ice) to +80°C
Compatible fluids:	
Heat transfer fluids in compliance with Italian national standards (UNI 8065 § 6)	
Threading:	
Pipeline connection	Threads according to ISO 228/1
Requirements and tests as per:	
Stop cock	EN 1213
Obturator seat tightness	Test P12 - EN 12266-1

SURFACE FINISH

Yellow brass sandblasted with steel microspheres

DISTRIBUTION TAPS YELLOW WITH HOSE FITTING

CONNECTIONS: MALE

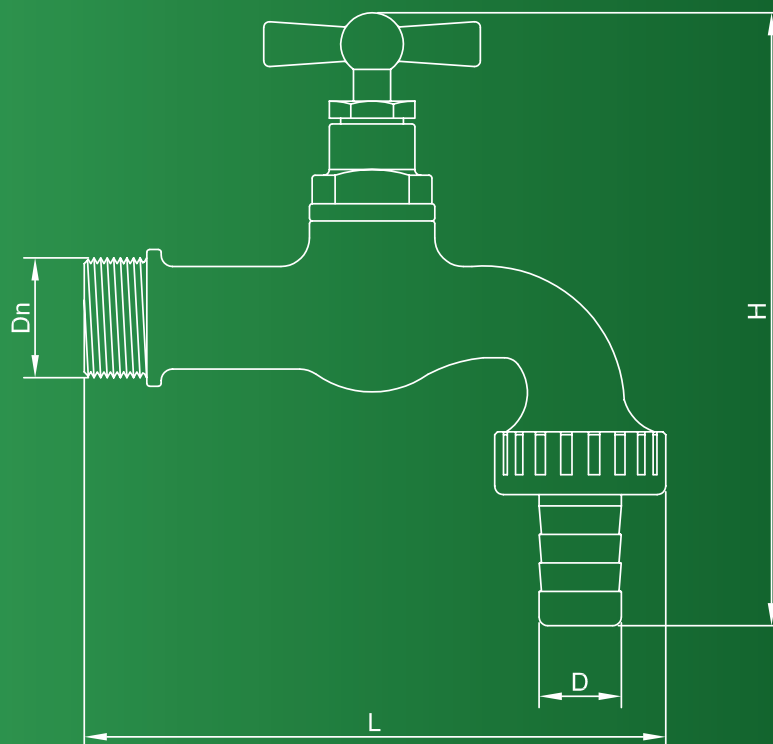

FEATURES

Dn	L	D	H
3/8"	97	Ø13	46
1/2"	111	Ø14	46
3/4"	138	Ø20	51
1"	154	Ø25	51