



technische import

Produkt informatie



FRATELLI PETTINAROLI SPA

www.bafa.nl




DESCRIPTION

59

F x F Heavy duty full-flow angle ball valve
Red butterfly handle

According to EN 13828

DIMENSIONS



D	1/2"	3/4"	1"
d	15	20	25
H	78	89	109
h	32	35	45
I	17	18	21.5
L	31	35	42
R	58	65	75
Acc.	1	2	3
g	220	340	630

All threads are in accordance with ISO 7/1 or ISO 228

MATERIALS



Body	CuZn40Pb2 Cw617N (DIN 50930 part.6)
Ball	CuZn40Pb2 Cw617N (DIN 50930 part.6) Diamond polished and chrome plated.
Spindle	CuZn39Pb3 Cw614N (DIN 50930 part.6)
Stuffing box	CuZn39Pb3 Cw614N (DIN 50930 part.6) Adjustable
Seats	PTFE
O-rings	2 x Viton® PTFE seal
Handle	Aluminium

TAIL VARIANTS

59	F X F, Red butterfly handle
59/1	F X M, Red butterfly handle
59/2	M X M, Red butterfly handle
59/9	M X F, Red butterfly handle


HANDLE VARIANTS

59	Red butterfly handle
----	----------------------

APPROVALS




PRESSURE DROP DIAGRAM

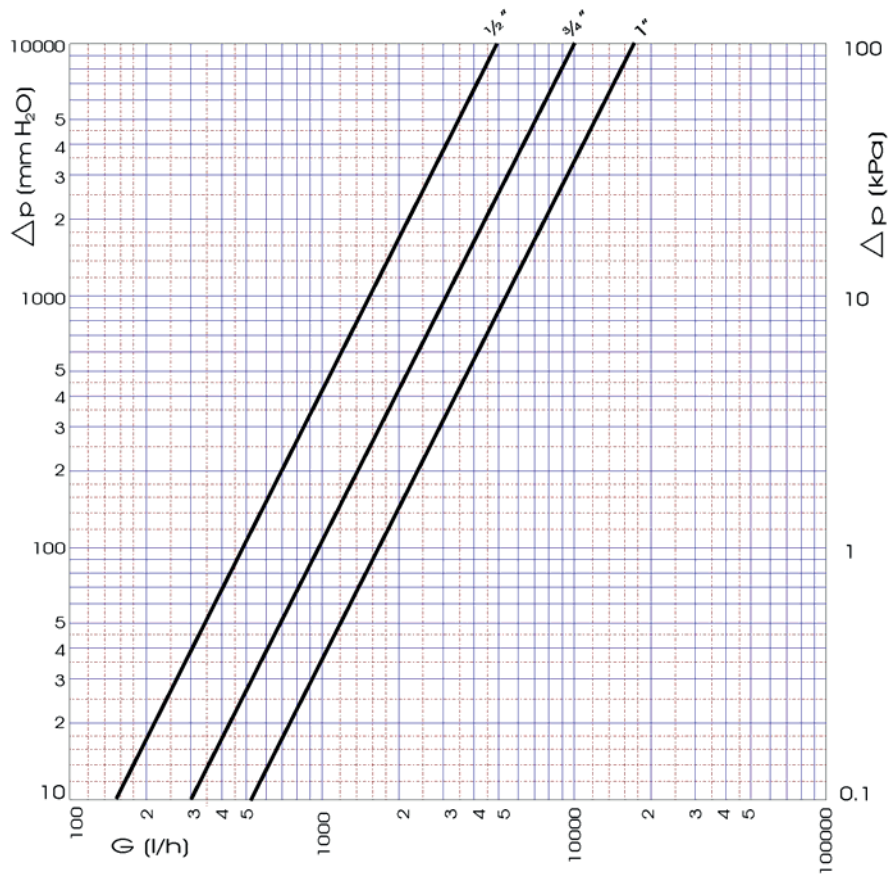

Dim.	1/2"	3/4"	1"
Kv	4.8	9.8	16.5
PN	16	16	16

TEMPERATURE / PRESSURE DIAGRAM

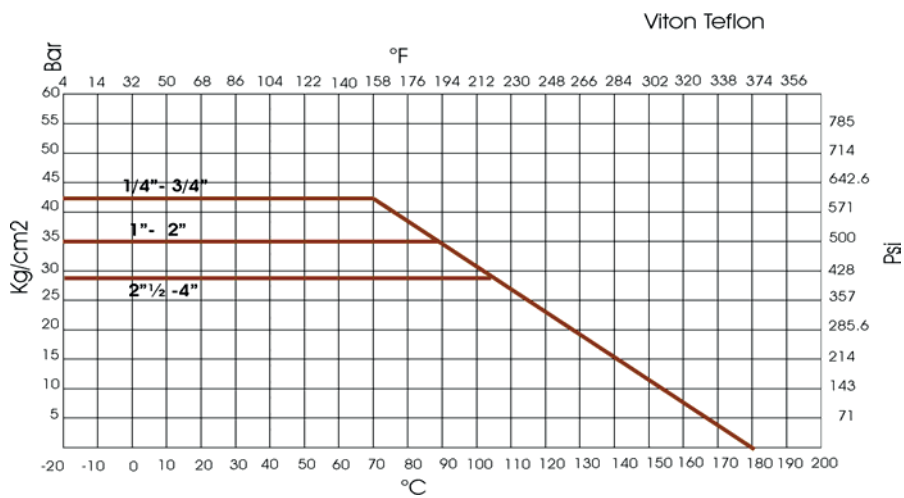

RECOMMENDED WORKING TEMPERATURE/ PRESSURE LIMIT

30 bar - 100°C - non shock
 10 bar - 150°C - non shock